

■ **Binary Display SO 1463**

Features

- 6 binary inputs
- 2 digits red LED display
- compact design

General

The SO 1463 has 6 inputs for processing binary signals. The binary input values are displayed as 2 digits decimal values.


The device is designed for switchboard mounting.

Technical data

Inputs: binary inputs; high side switched

Power supply: 18-36 VDC



Power consumption: 8 mA max.

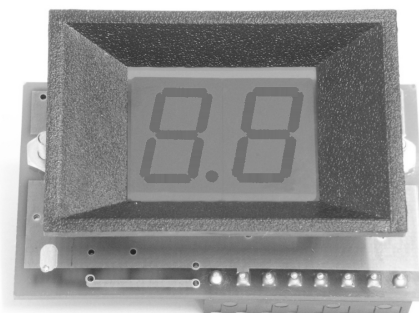

Order key


SO 1463					
---------	--	--	--	--	--

Connection

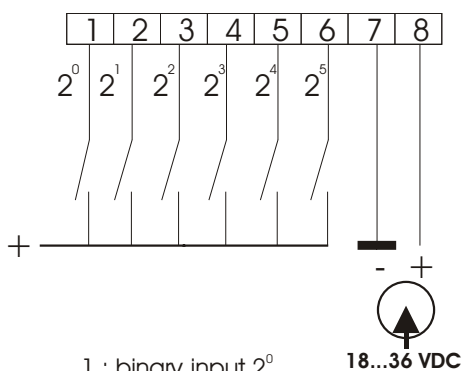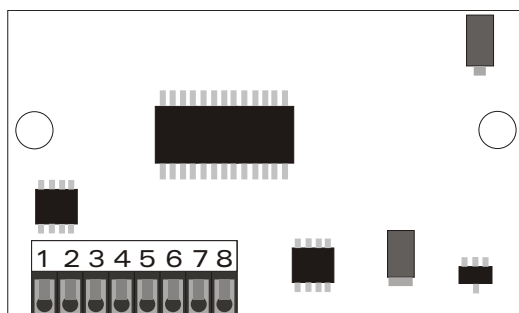

- 1 : binary input 2^0
- 2 : binary input 2^1
- 3 : binary input 2^2
- 4 : binary input 2^3
- 5 : binary input 2^4
- 6 : binary input 2^5
- 7 : ground
- 8 : power supply 18...36 VDC

Dimensions

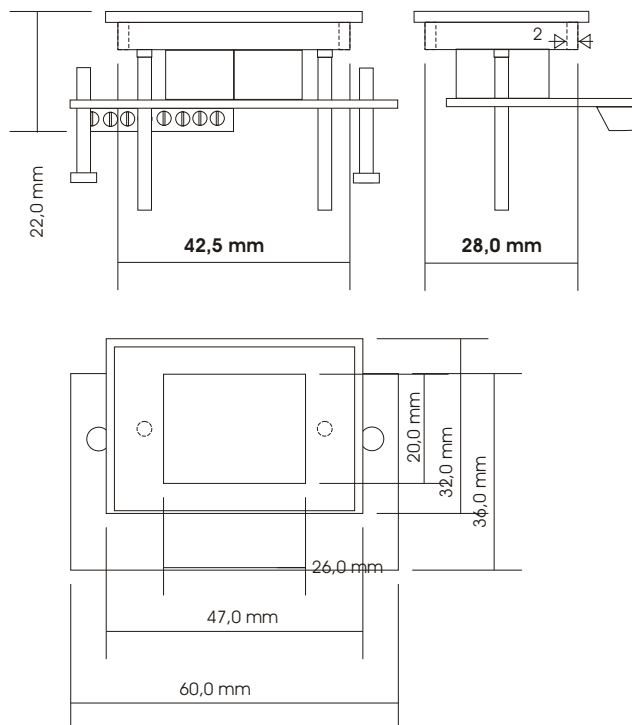

Mounting

